


Dimension

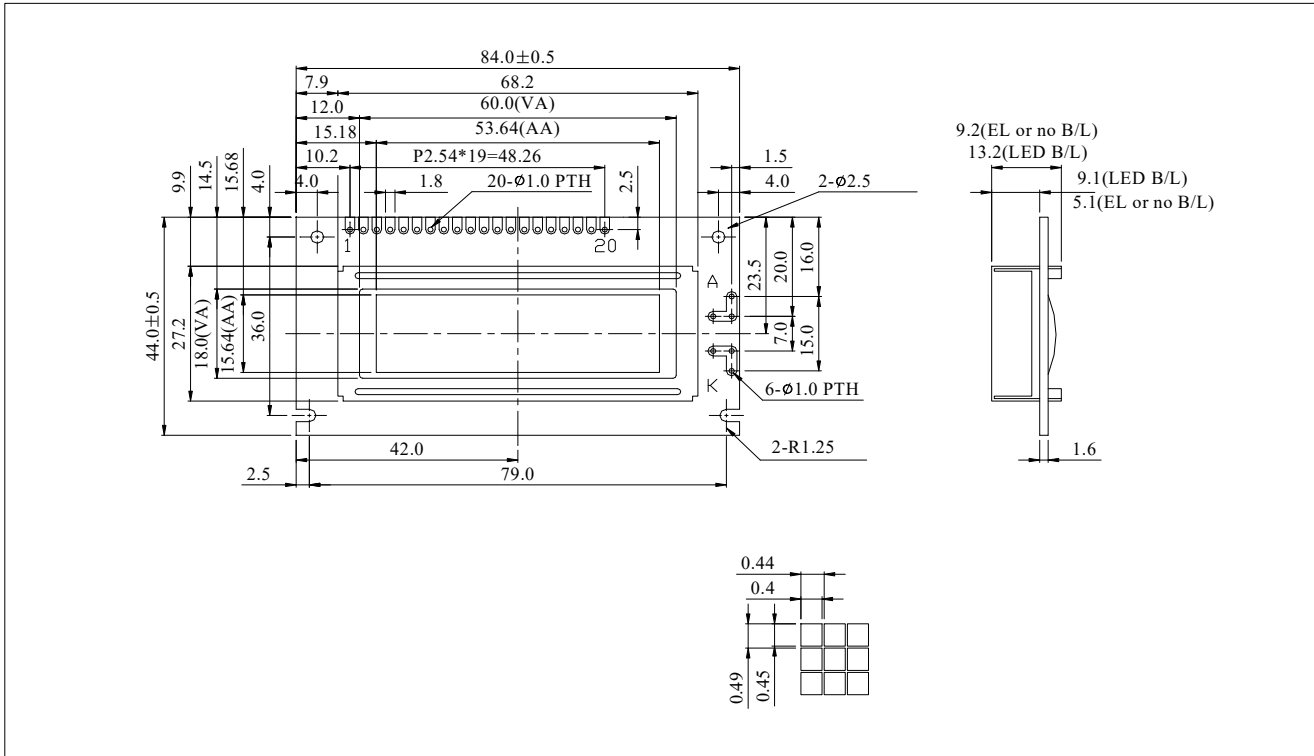

FEATURE

1. 122*32 dots
2. Logic Power +5v(+3V) Input
3. Built in SED1520DOA(AX61200A) Controller
4. 1/32 Duty
5. Internal Clock Use

MECHANICAL DATA		
Item	Standard Value	Unit
Module Dimension	84.0 * 44.0	mm
Viewing Area	60.0 * 18.0	mm
Dot Pitch	0.44 * 0.49	mm
Dot Size	0.4 * 0.45	mm

INTERFACE FUNCTIONS

Pin NO	Symbol	Function
1	VSS	0V Logic GND
2	VDD	5V Logic Power
3	VO	LCD Operating Volt.
4	AO	Data/Command Select
5	E1	Enable Left 61*32 area
6	E2	Enable Right 61*32 area
7	NC	
8	NC	
9	R/W	Rear/Write Signal
10~17	D0~D7	Data Bus D0~D7
18	Reset	Reset Signal,H->L Reset
19	A	LED B/L V+
16	K	LED B/L V-

ABSOLUTE MAXIMUM RATING					
Item	Symbol	Standard Value			Unit
		min	typ	max	
Power Supply	VDD-VSS	2.5	5.0	5.5	V
Input Voltage	VIH	0.7Vdd	Vdd	Vdd+0.3	V

ELECTRONICAL CHARACTERISTICS						
Item	Symbol	Condition	Standard Value			Unit
			min	typ	max	
Input Voltage	VDD	25°C	2.7	5.0	5.3	V
Supply Current	IDD	25°C	1.0	1.5	2.0	mA
LCD Driving Voltage for	VDD-VO	-20°C	5.2	5.5	6.0	V
		0°C	4.8	5.0	5.2	
		25°C	4.2	4.5	4.8	
		50°C	4.1	4.3	4.5	
		70°C	3.8	4.0	4.2	
LED Forward Voltage	VF	25°C	4.0	4.2	4.5	V
LED Forward Current	IF	25°C	80	120	200	mA