



FPC弯折示意图
FPC弯折出货

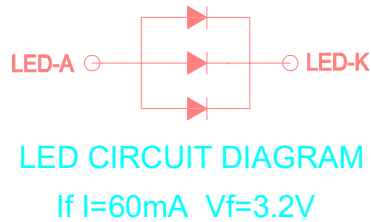

Pin Description


PIN	Symbol
1	LEDK
2	GND
3	FMARK
4	SDA
5	WR
6	RS
7	CS
8	RESET
9	IOVCC18
10	VCC28
11	VCC28
12	GND
13	GND
14	LEDA
15	LEDA

Specification

1. Display mode: a-Si TFT / Normally White IPS / TRANSMISSIVE
2. Viewing Direction: All O'clock 3. Power supply voltage: Vdd=2.8V
4. Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
5. DRIVER IC.: ST7789V-G4
6. BACKLIGHT: VF=3.2V(TYP.) IF=60mA 3 White LED
7. Unspecified tolerance : ±0.30mm
8. Remark: RoHS
9. LUMINANCE: 250 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name

SUY020005-024032

SCALE SHEET

NTS 1/1

UNIT SIZE

DESIGNER

CHECK

APPROVER

FILE NAME

mm

A4

Ken Lin

jack hu

Jason Lu

Count Dwg.