
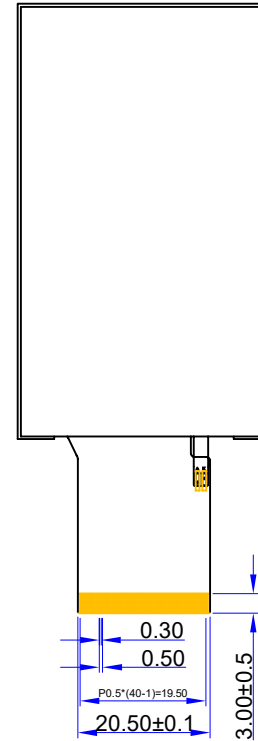
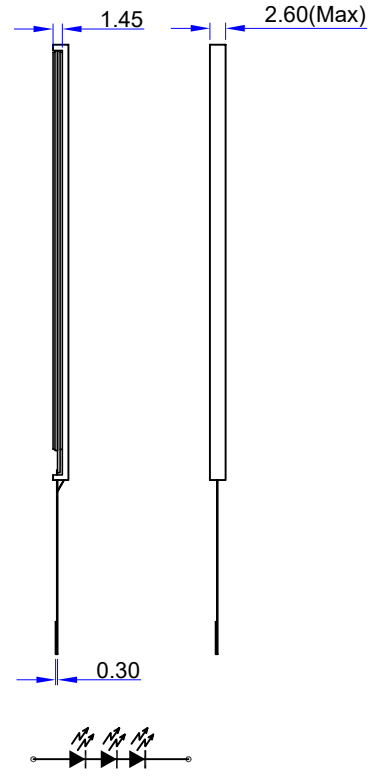


CUSTOMER

CUSTOMER'S CODE

RoHS

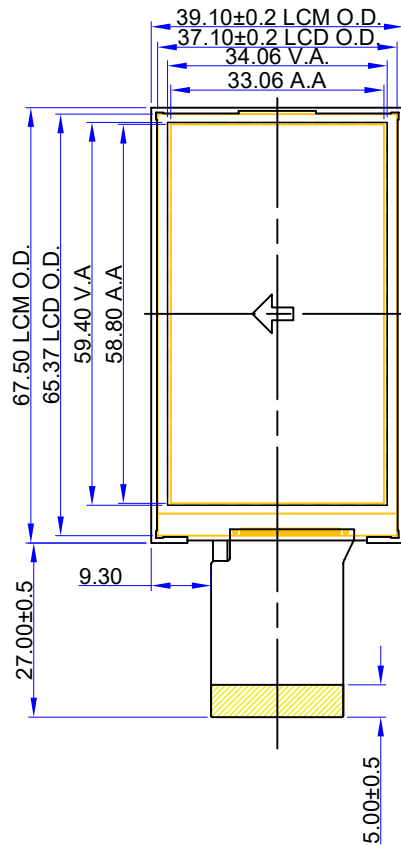

Pin	Symbol
1	VCOM
2	FB
3	VLED
4	DRV
5	VCAC
6	VCOMDC
7	FRP
8	AGND
9	VGL
10	VGH
11	C4M
12	C4P
13	VINT3
14	VINT2
15	C3M
16	C3P
17	VINT1
18	C2M
19	C2P
20	C1N
21	C1P
22	DVDD
23	VDDIO
24	VDD
25	GND
26	DB0
27	DB1
28	DB2
29	DB3
30	DB4
31	DB5
32	DB6
33	DB7
34	CLKIN
35	VSD
36	HSD
37	SPCK
38	SPDA
39	SPENB
40	VCOM

Specification

- 1.Display mode: a-Si TFT / Normally White TN / TRANSMISSIVE
- 2.Viewing Direction:3 O'clock 3.Power supply voltage: Vdd=3.3V
- 4.Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
- 5.DRIVER IC.: ILI8961 6.INTERFACE : 8bit RGB Interface
- 7.BACKLIGHT: VF=9.6V(TYP.) IF=15mA 3 White LED
- 8.Unspecified tolerance : ±0.30mm
- 9.Remark: RoHS 10.LUMINANCE: 220 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY027002-024096

SCALE	SHEET
NTS	1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.