
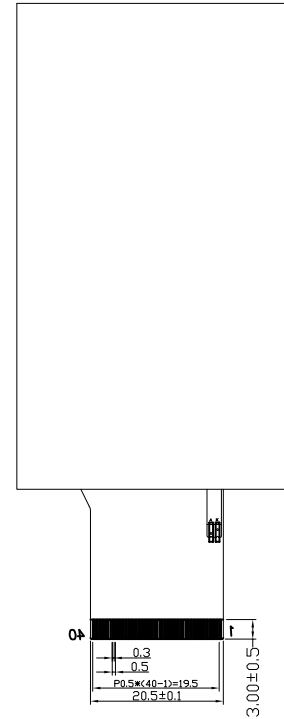
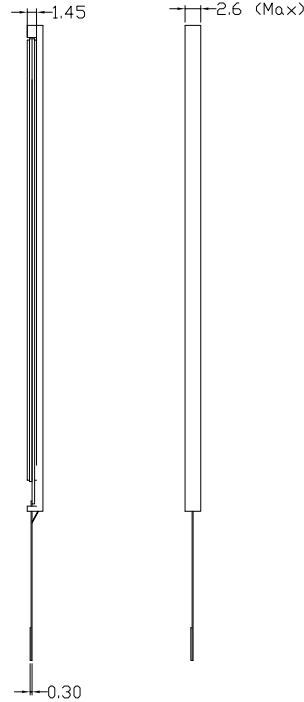


CUSTOMER

CUSTOMER'S CODE

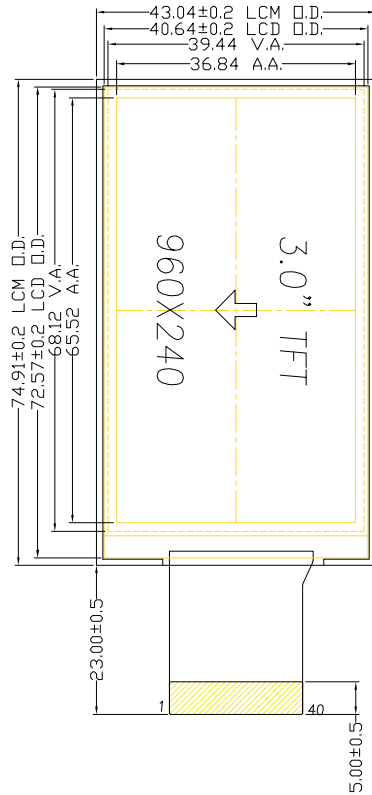

LEDA LEDK1
LED CIRCUIT DIAGRAM


Pin	Symbol
1	VCOM
2	FB
3	VLED
4	DRV
5	VCAC
6	VCOMDC
7	FRP
8	AGND
9	VGL
10	VGH
11	C4M
12	C4P
13	VINT3
14	VINT2
15	C3M
16	C3P
17	VINT1
18	C2M
19	C2P
20	C1M
21	C1P
22	DVDD
23	VDDIO
24	VDD
25	DGND
26	D7
27	D6
28	D5
29	D4
30	D3
31	D2
32	D1
33	D0
34	CLKIN
35	VSD
36	HSD
37	SPCK
38	SPDA
39	SPENB
40	VCOM

Specification

1. Display mode: 3.0" TFT LCD, Transmissive
2. Viewing Direction: 3 O' clock
3. Back-Light: 4 CHIP-WHITE LED, IF=20mA, VF=12.3V (Patent LED)
4. Operating temp: -10°C to 60°C , Storage temp: -20°C to 70°C
5. IC NO. : HX8268-C 6. LCM Luminance : Typ.250cd/m²
6. Unspecified tolerance : ±0.20mm
7. Remark: RoHS LCD NO.:

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY030002-024096

SCALE	SHEET
NTS	1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.