
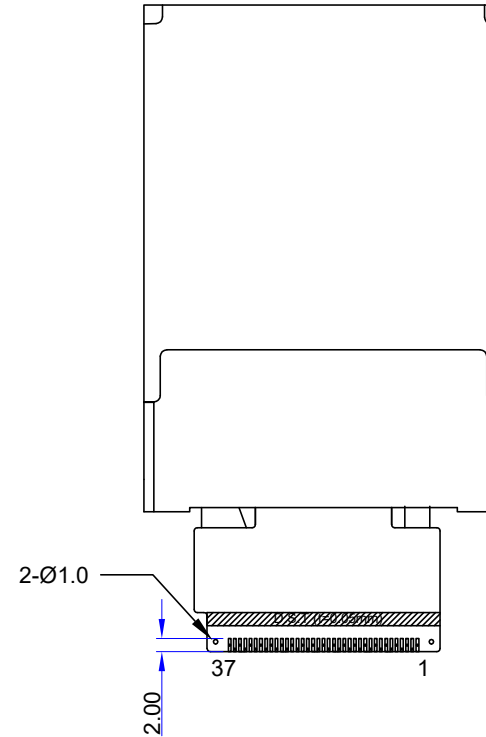
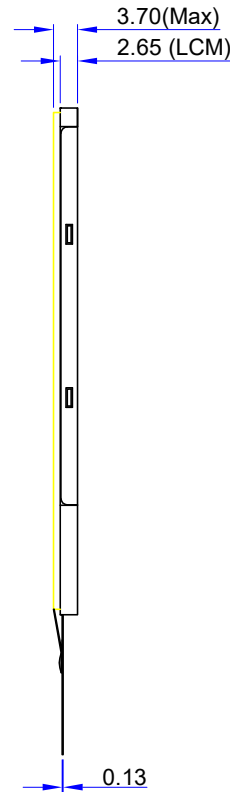



CUSTOMER

CUSTOMER'S CODE

RoHS

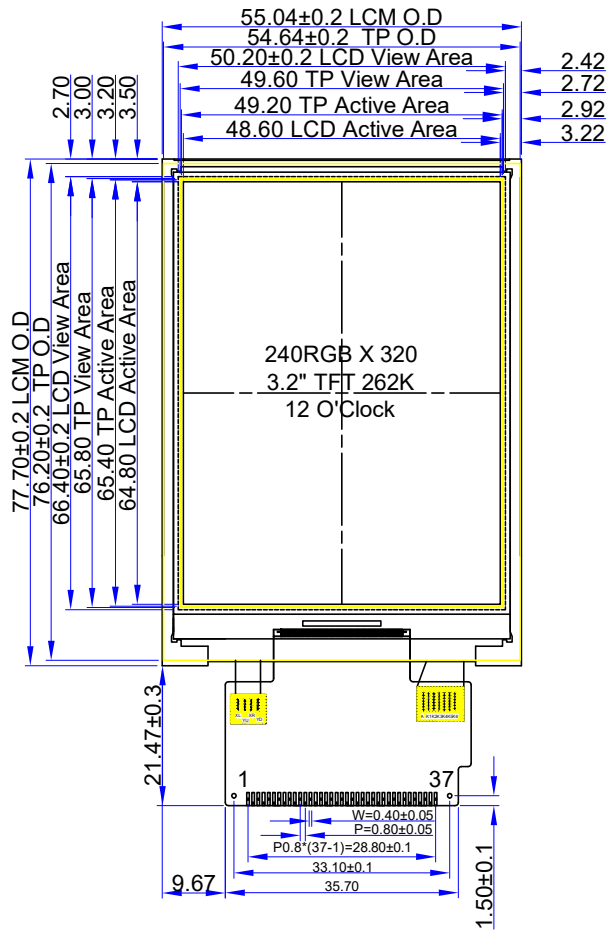

Pin define			
No.	Symbol	No.	Symbol
1	DB8	20	LED-K5
2	DB9		LED-K6
3	DB10	21	NC
4	DB11	22	DB12
5	GND	23	DB0
6	VCI	24	DB1
7	CS	25	DB2
8	RS	26	DB3
9	WR	27	DB4
10	RD	28	DB5
11	XL	29	DB6
12	YU	30	DB7
13	XR	31	RESET
14	YD	32	IOVCC
15	LED-A	33	VCI
16	LED-K1	34	GND
17	LED-K2	35	DB13
18	LED-K3	36	DB14
19	LED-K4	37	DB15



LED CIRCUIT DIAGRAM
 If =110mA Vf=3.2V

Specification

- 1.Display mode: a-Si TFT / Normally White TN / TRANSMISSIVE
- 2.Viewing Direction:12 O'clock 3.Power supply voltage: Vdd=3.3V
- 4.Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
- 5.DRIVER IC.: ILI9341 6.INTERFACE : MCU16 bits Interface
- 7.BACKLIGHT: VF=3.2V(TYP.) IF=110mA 6* White LED
- 8.Unspecified tolerance : ±0.30mm
- 9.Remark: RoHS
- 10.LUMINANCE: 250 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY032002-024032

SCALE SHEET
 NTS 1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.