


CUSTOMER


CUSTOMER'S CODE

RoHS

1	GND
2	LCD_ID
3	VCC 2.8V
4	GND
5	IOVCC 1.8V
6	GND
7	RESET
8	LCDPWM
9	GND
10	OTP (NC)
11	TE
12	GND
13	GND
14	MIPI DSI DIN
15	MIPI DSI D1P
16	GND
17	MIPI DSI CLKP
18	MIPI DSI CLKN
19	GND
20	MIPI DSI DON
21	MIPI DSI DOP
22	GND
23	LEDA
24	LEDK

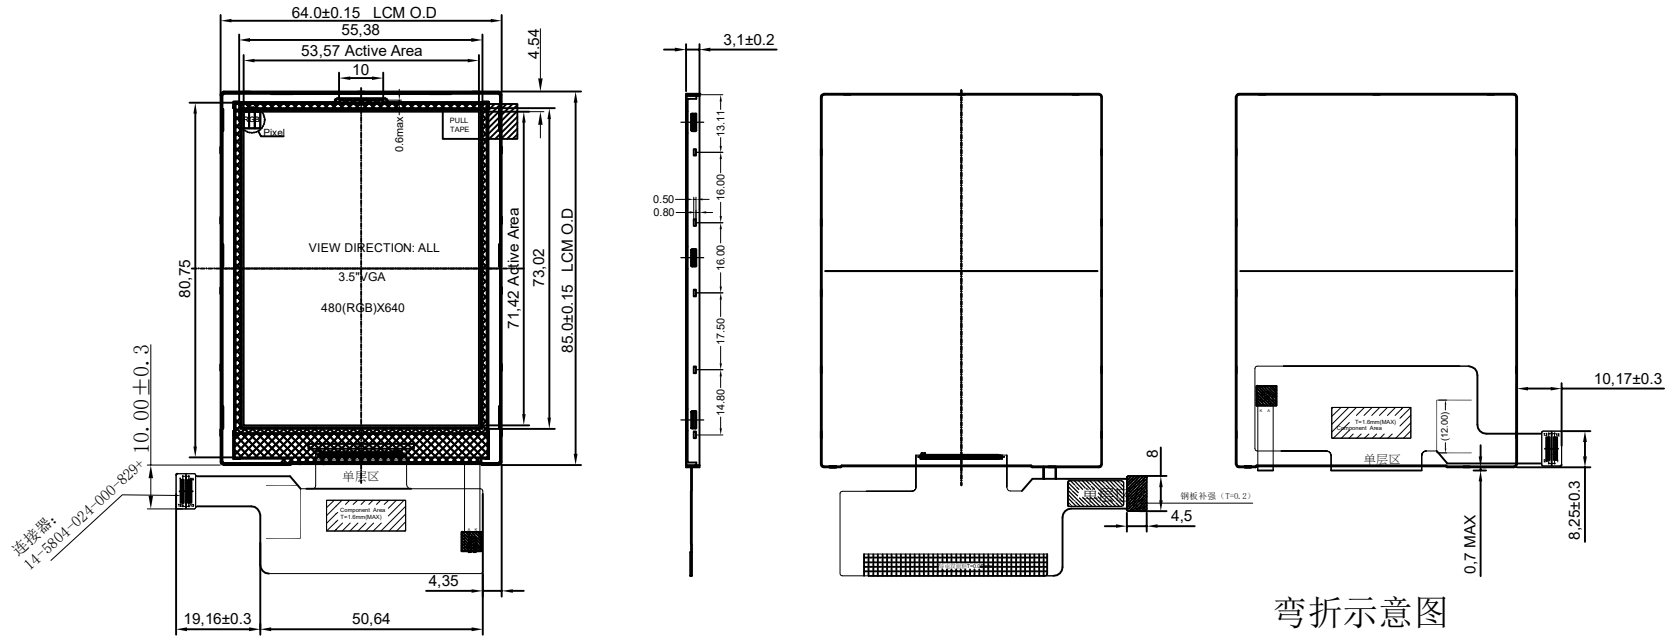

弯折示意图  
弯折出货

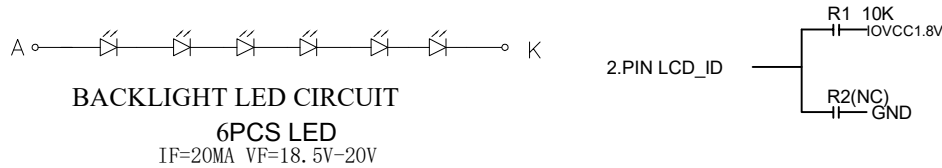


Specification

1.Display mode: a-Si TFT / Normally White	
2.Viewing Direction:ALL O'clock	3.Power supply voltage: Vdd=3.3V
4.Operating temp: -20°C to 70°C	Storage temp: -30°C to 80°C
5.INTERFACE : MIPI Interface	
6.BACKLIGHT: VF=19.3V(TYP.) IF=20mA 6-chip White LED	
7.DRIVER IC.:HX8363A	8.Unspecified tolerance : ±0.20mm
9.Remark: RoHS	10.LUMINANCE: 200 cd/m <sup>2</sup> (TYP.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name		SUY035009-048064		
UNIT	SIZE	DESIGNER	CHECK	APPROVER
mm	A4	Ken Lin	jack hu	Jason Lu

SCALE	SHEET
NTS	1/1

FILE NAME
Count Dwg.