
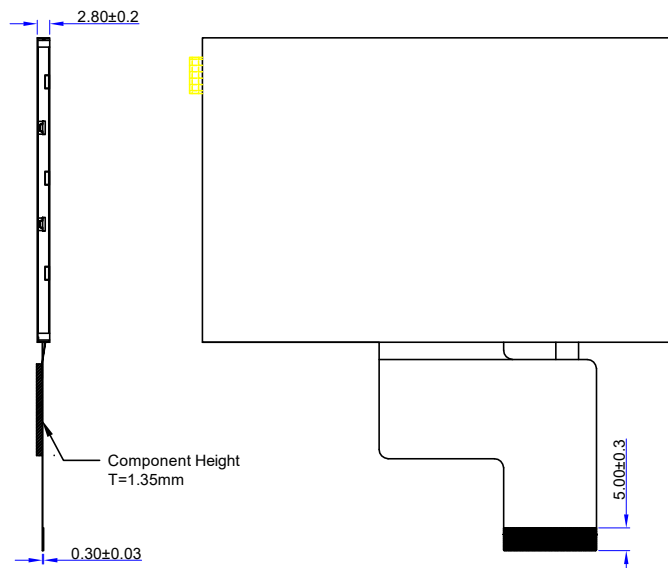



CUSTOMER

CUSTOMER'S CODE

RoHS

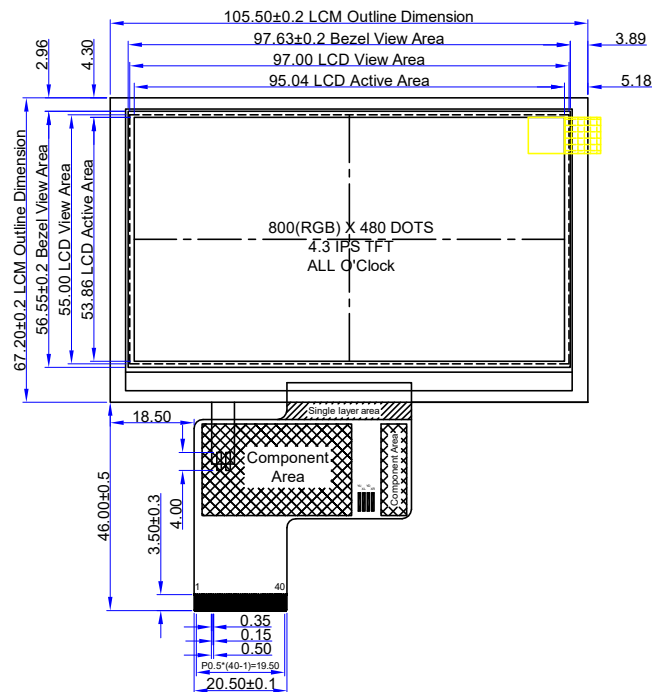

Pin Assignment	
PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VDD
5-12	R0-R7
13-20	G0-G7
21-28	B0-B7
29	GND
30	CLKIN
31	STBYB
32	HSD
33	VSD
34	DEN
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)



IF=40mA VF=16.0V(TYP.)

LED CIRCUIT DIAGRAM

Specification	
1.Display mode:	a-Si TFT / Normally White /IPS / TRANSMISSIVE
2.Viewing Direction:	All O'clock
3.Power supply voltage:	Vdd=3.3V
4.Operating temp:	-20°C to 70°C
Storage temp:	-30°C to 80°C
5.DRIVER IC.:	HX8264+8664
6.INTERFACE :	24bit RGB PARALEL Interface
7.BACKLIGHT:	VF=16.0V(TYP.) IF=40mA 10-chip White LED
8.Unspecified tolerance :	±0.30mm
9.Remark:	RoHS
10.LUMINANCE:	500 cd/m ² (MIN.)

CUSTOMER'S APPROVAL

SAZENTO				
Mod.Name		SUY043003-080048		
UNIT	SIZE	DESIGNER	CHECK	APPROVER
mm	A4	Ken Lin	jack hu	Jason Lu

SCALE	SHEET
NTS	1/1
FILE NAME	
Count Dwg.	