



CUSTOMER

CUSTOMER'S CODE

**RoHS**

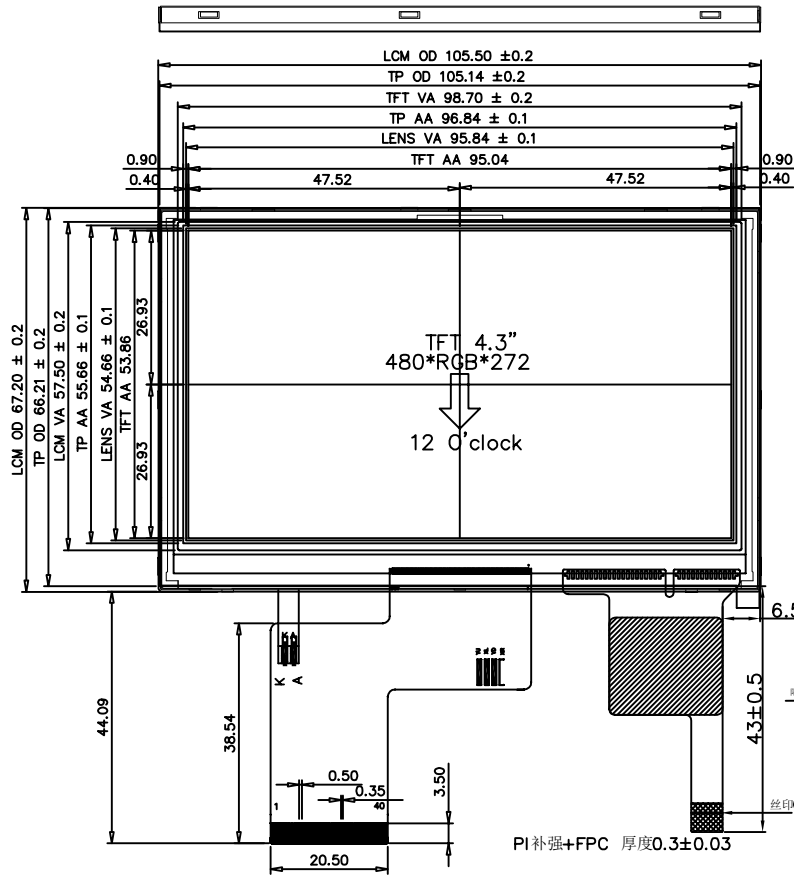

LCM 4.5±0.2  
CTP 1.40  
Frame 3.0  
TFT 3.00

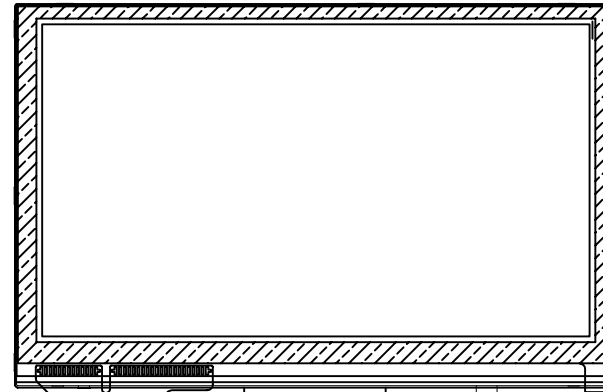


LCM FPC Pin Assignment	
No.	Symbol
1	LEDK
2	LEDA
3	GND
4	VCC
5-12	DR0-DR7
13-20	DG0-DG7
21-28	DB0-DB7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

CTP FPC Pin Assignment	
No.	Symbol
1	NC
2	NC
3	RST
4	GND
5	INT
6	SDA
7	SCL
8	GND
9	GND
10	VDD

CTP Technical Information		
No.	Symbol	Description
1	Structure	Cover lens+Sensor+FPC
2	CG thickness	0.7mm
3	Sensor thickness	0.55mm
4	Connector	FPC
5	Total thickness	1.4±0.05mm
6	Control IC	FT5306
7	Operating voltage	2.8~3.3V
8	Transmittance	≥83%
9	Surface hardness	6H
10	Operating environment	-10℃~60℃, ≦90%RH
11	Storage environment	-20℃~70℃, ≦90%RH
12	Unspecified tolerance	±0.2mm




**Specification**

1. Display mode: 4.3" TFT LCD, Transmissive
2. Viewing Direction: 12 O'clock
3. Back-Light: 7 CHIP-WHITE LED, IF=20mA, VF=22.4V
4. Operating temp: -20°C to 70°C, Storage temp: -30°C to 80°C
5. IC NO.: ST7282 6. LCM Luminance : Typ. 250cd/m<sup>2</sup>
6. Unspecified tolerance : ±0.20mm
7. Remark: RoHS LCD NO.:

**CUSTOMER'S APPROVAL**

SAZENTO



Mod.Name SUY043006-048027

SCALE SHEET

NTS 1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.