
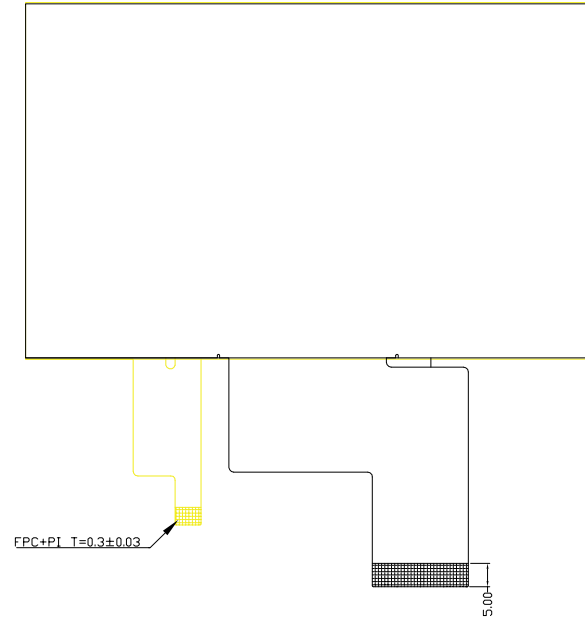
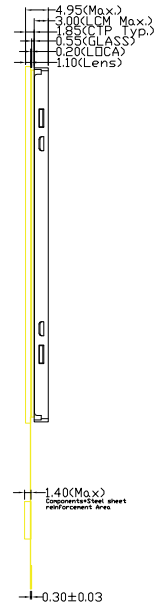



CUSTOMER

CUSTOMER'S CODE

**RoHS**

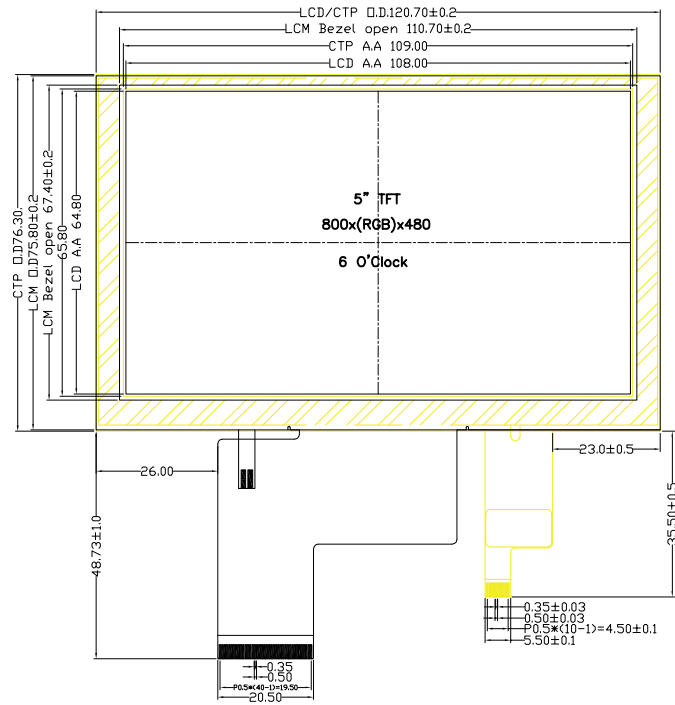

LCM Pin Define	
PIN NO.	DEFINE
1	GLED
2	VLED
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HS
33	VS
34	DE
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

CTP Pin Define	
PIN NO.	DEFINE
1	VSS
2	VDD
3	SCL
4	VSS
5	SDA
6	VSS
7	/RST
8	NC
9	INT
10	VSS


CTP Technical Parameters  
 1.IC: GT911  
 2.Operating Voltage: 2.8V~3.3V  
 3.Transmittance: ≥80%  
 4.Surface hardness: ≥6H  
 5.Operating environment: -10°C~60°C, ≤90%RH  
 6.Storage environment: -20°C~70°C, ≤90%RH

**Specification**

- 1. Display mode: 5" TFT LCD, Transmissive
- 2. Viewing Direction: 6 O'clock (70/70/50/70)
- 3. Back-Light: 12 CHIP-WHITE LED, IL=40mA, VL=19.8V
- 4. Operating temp: -20°C to 60°C , Storage temp: -30°C to 70°C
- 5. IC NO. : ILI6122/ILI5960
- 6. Unspecified tolerance : ±0.20mm
- 7. Remark: RoHS LCD NO.:

**CUSTOMER'S APPROVAL**

**SAZENTO**



Mod.Name SUY050003-080048

SCALE SHEET

NTS 1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.