



CUSTOMER

CUSTOMER'S CODE

RoHS

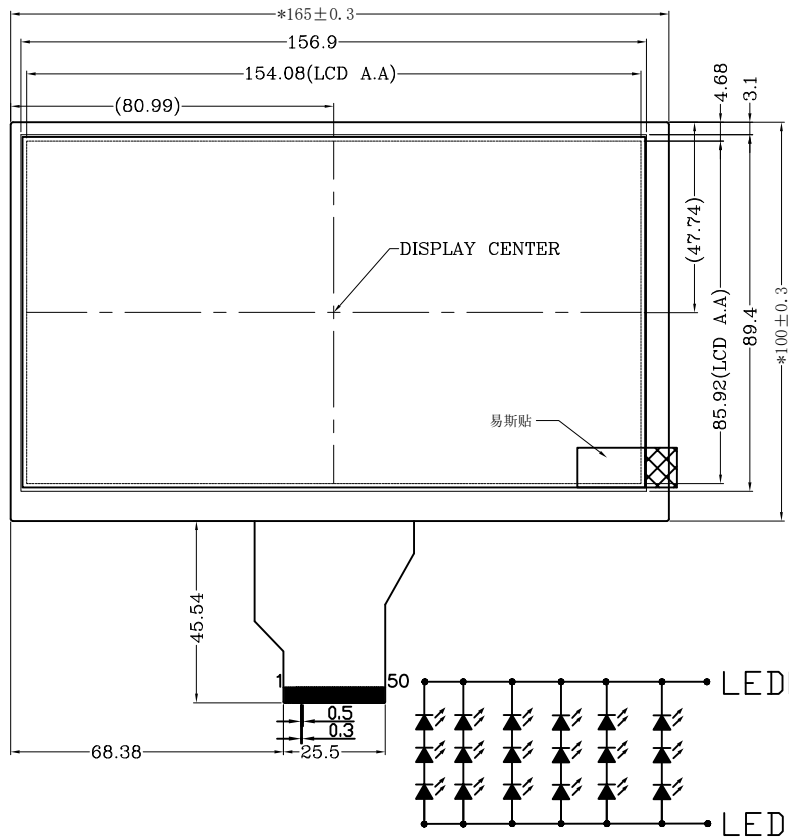

IF=120mA VF=9.3V (TYP.)
LED CIRCUIT DIAGRAM

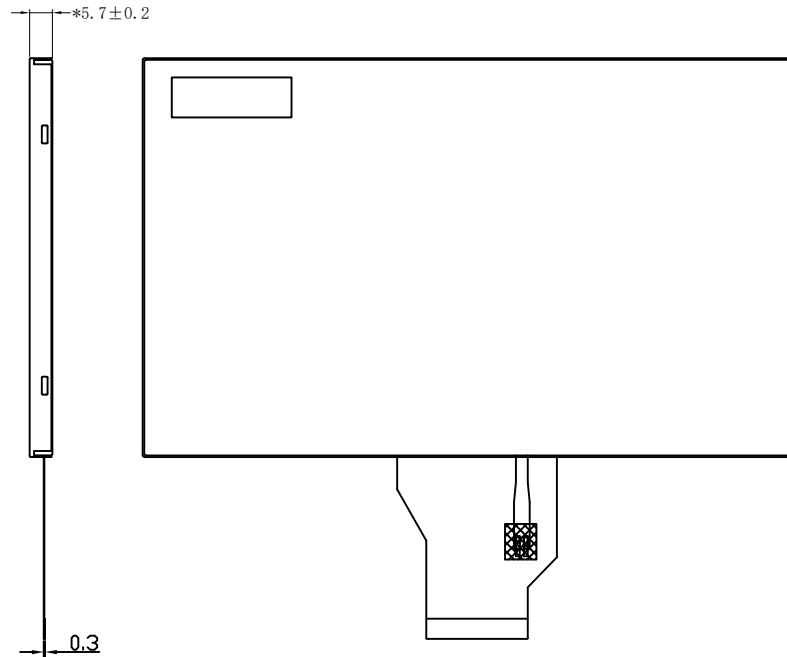


Pin	DESCRIPTION
1	VLED+
2	VLED+
3	VLED+
4	VLED+
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL

TFT Specification

- 1. Display mode: 7" a-Si TFT / Normally White / TRANSMISSIVE
- 2. Viewing Direction: 12 O'clock
- 3. Power supply voltage: Vdd=3.3V
- 4. Operating temp: -20°C to 70°C, Storage temp: -30°C to 80°C
- 5. DRIVER IC.: **
- 6. INTERFACE : RGB Interface
- 7. BACKLIGHT: VF=9.3V(TYP.) IF=120mA 18-chip White LED
- 8. Unspecified tolerance : ±0.30mm
- 9. LUMINANCE: 200 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY070010-080048

SCALE SHEET
NTS 1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	TFT