


CUSTOMER


CUSTOMER'S CODE

RoHS

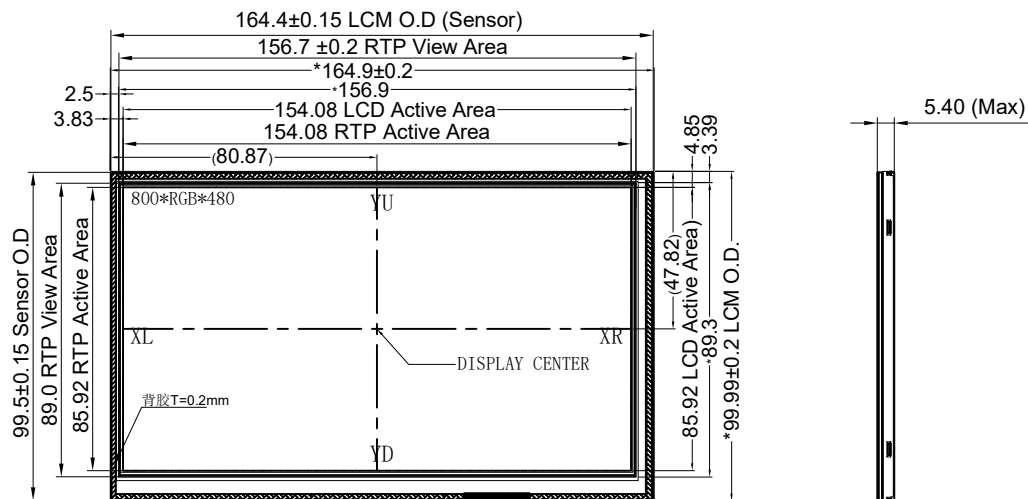


RTP Specification:

1. 结构: film+glass+FPC+底胶
film: 亮面防牛 (T=0.188mm)
glass: 普通玻璃(1.1mm)
tail: FPC (pitch=1.0mm)
2. 工作电压: ≤+5v, ≤+5mA
3. 绝缘阻抗: ≥20MΩ(25V DC)
4. 线性: ≤1.5%
5. 透光率: ≥78%
6. 操作压力: 50-120g
7. 表面硬度: 3H
8. 打点寿命: ≥1,000,000次
9. 笔划寿命: ≥100,000次
10. 工作环境: -10℃~+60℃
11. 储存环境: -20℃~+70℃
12. 回路电阻: X: 100-1200Ω Y: 100-1200Ω
13. 反应时间: ≤10ms
14. 未注尺寸公差按±0.20mm

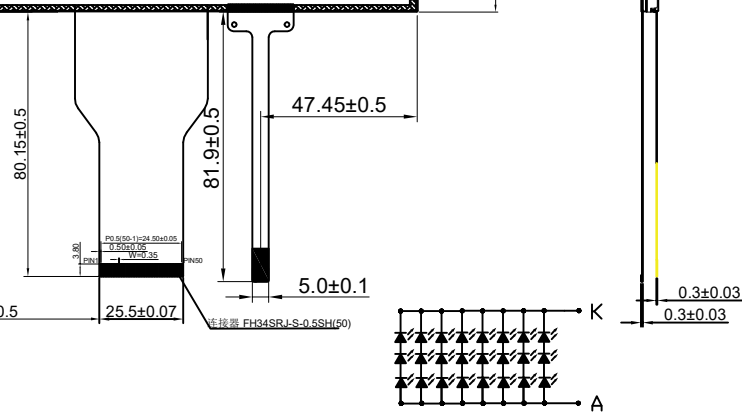

IF=160mA VF=9.6V (TYP.)

LED CIRCUIT DIAGRAM

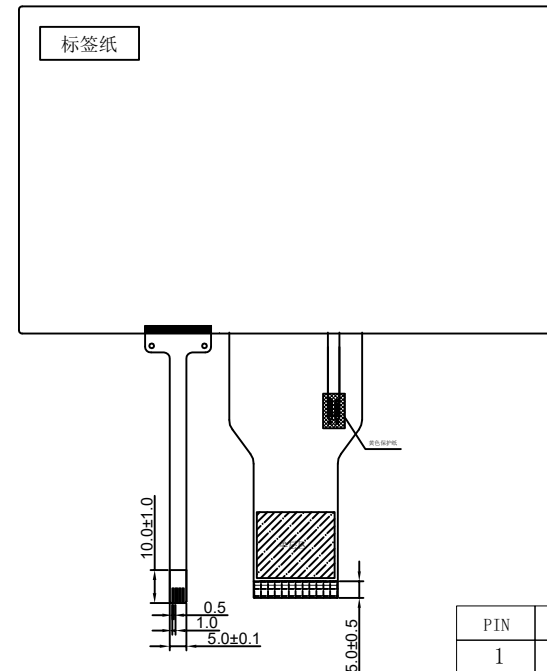

PIN	DESCRIPTION
1	VEB
2	VEB
3	VEB
4	VEB
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCON
47	DITHB
48	GND
49	NC
50	NC

PIN	OUT
1	XL
2	YD
3	XR
4	YU

TFT Specification

1. Display mode: 7" a-Si TFT / Normally White / TRANSMISSIVE
2. Viewing Direction: 12 O'clock
3. Power supply voltage: Vdd=3.3V
4. Operating temp: -20℃ to 70℃, Storage temp: -30℃ to 80℃
5. DRIVER IC: **
6. INTERFACE: RGB Interface
7. BACKLIGHT: VF=9.6V(TYP.) IF=160mA 24-chip White LED
8. Unspecified tolerance: ±0.30mm
9. LUMINANCE: 320 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO

Mod.Name SUY070012-080048RTP

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	TFT

SCALE		SHEET	
1/1		1/1	