
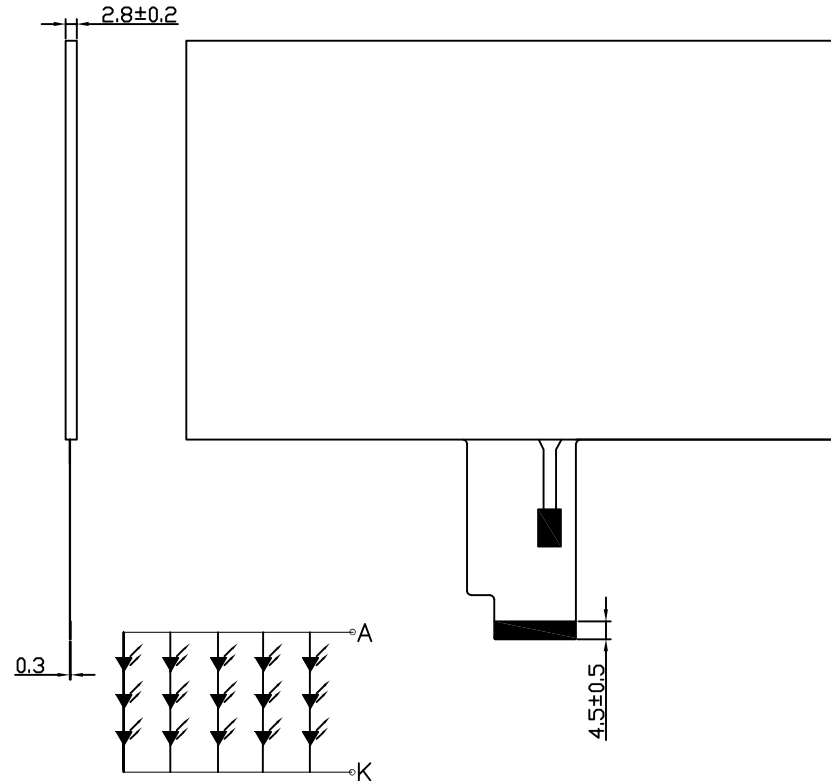


CUSTOMER

CUSTOMER'S CODE

RoHS

Pin Define	
Pin No.	Symbol
1	VCDM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	NIND0
9	PIND0
10	GND
11	NIND1
12	PIND1
13	GND
14	NIND2
15	PIND2
16	GND
17	NINC
18	PINC
19	GND
20	NIND3
21	PIND3
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	VLED-
32	VLED-
33	SHLR
34	UPDN
35	VGL
36	NC
37	NC
38	VGH
39	VLED+
40	VLED+

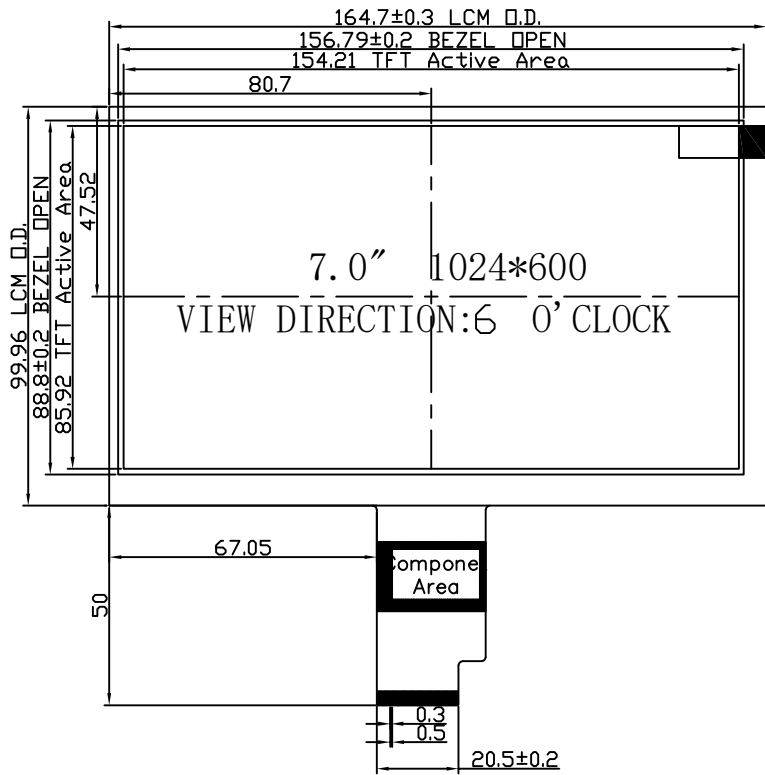

IF=100mA VF=9.6V (TYP.)


LED CIRCUIT DIAGRAM

TFT Specification

1. Display mode: 7" a-Si TFT / Normally White / TRANSMISSIVE
2. Viewing Direction: 6 O'clock 3. Power supply voltage: Vdd=3.3V
4. Operating temp: -20°C to 70°C , Storage temp: -30°C to 80°C
5. DRIVER IC.: **
6. INTERFACE : LVDS Interface
7. BACKLIGHT: VF=9.6V(TYP.) IF=100mA 15-chip White LED
8. Unspecified tolerance : ±0.30mm 9. LUMINANCE: 200 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY070014-102060

SCALE SHEET

NTS 1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	TFT