


CUSTOMER


CUSTOMER'S CODE

RoHS

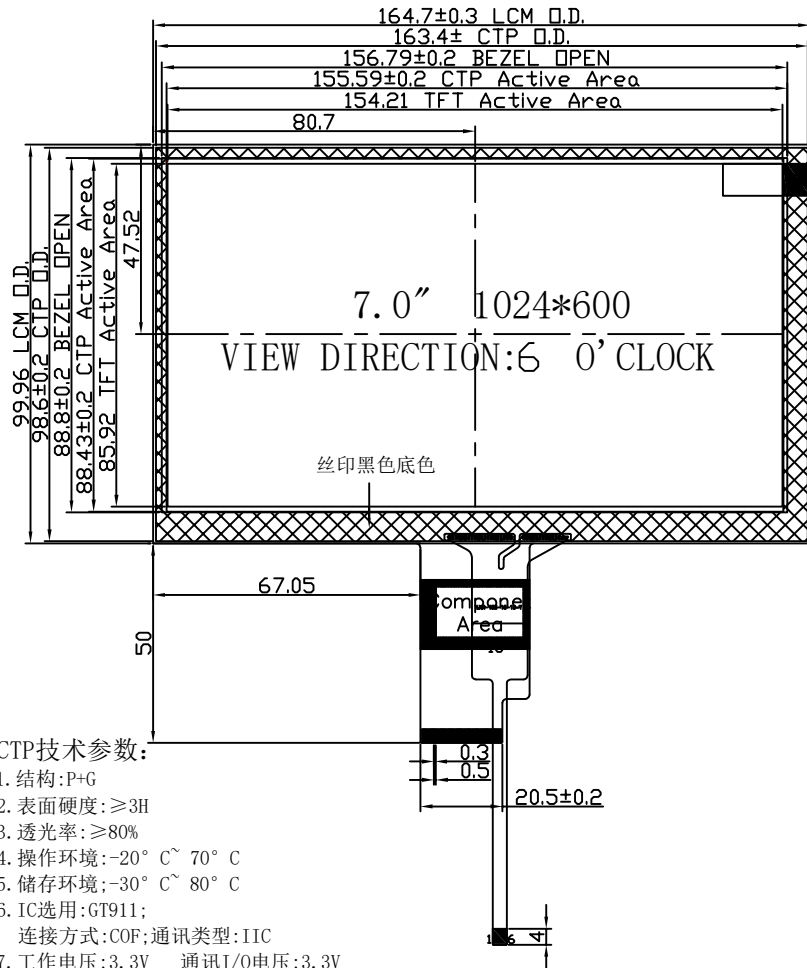

CTP技术参数:

1. 结构:P+G
2. 表面硬度: $\geq 3H$
3. 透光率: $\geq 80\%$
4. 操作环境: $-20^{\circ}C \sim 70^{\circ}C$
5. 储存环境: $-30^{\circ}C \sim 80^{\circ}C$
6. IC选用: GT911;
连接方式: COF; 通讯类型: IIC
7. 工作电压: 3.3V 通讯I/O电压: 3.3V
8. 未注尺寸公差: ± 0.2

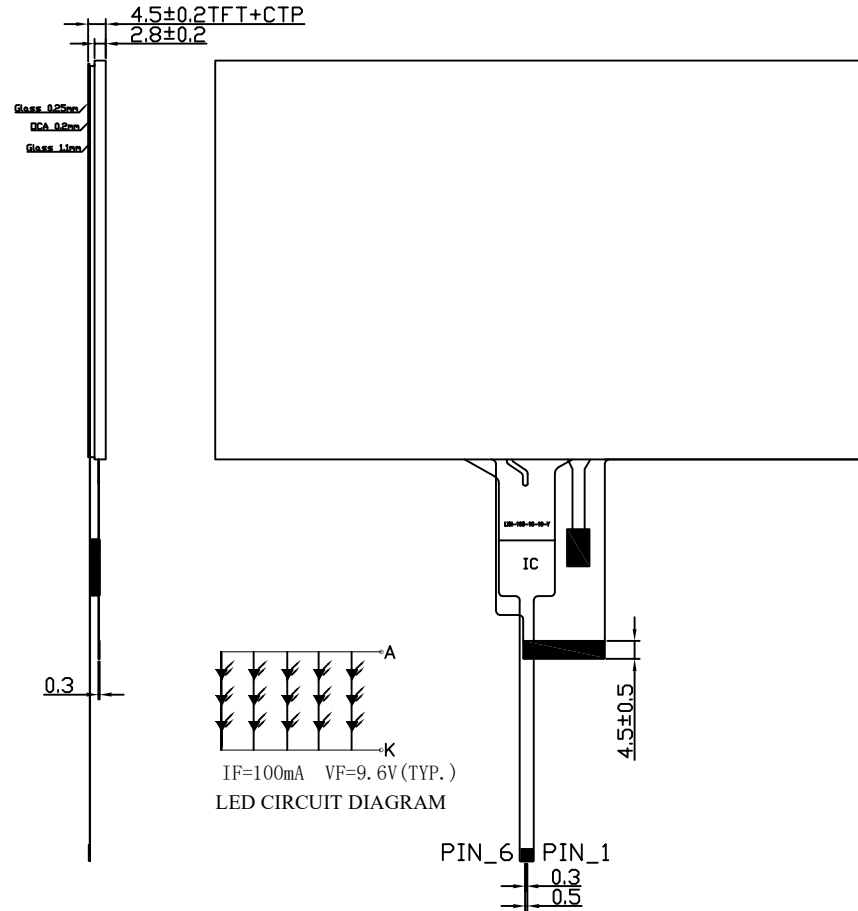

TFT Pin No.	Pin Define
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	NIND0
9	PIND0
10	GND
11	NIND1
12	PIND1
13	GND
14	NIND2
15	PIND2
16	GND
17	NINC
18	PINC
19	GND
20	NIND3
21	PIND3
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	VLED-
32	VLED-
33	SHLR
34	UPDN
35	VGL
36	NC
37	NC
38	VGH
39	VLED+
40	VLED+

CTP Pin No.	Pin Define
1	RST
2	VCC
3	GND
4	INT
5	SDA
6	SCL

TFT Specification


1. Display mode: 7" a-Si TFT / Normally White / TRANSMISSIVE
2. Viewing Direction: 6 O'clock
3. Power supply voltage: Vdd=3.3V
4. Operating temp: $-20^{\circ}C$ to $70^{\circ}C$, Storage temp: $-30^{\circ}C$ to $80^{\circ}C$
5. DRIVER IC: **
6. INTERFACE: LVDS Interface
7. BACKLIGHT: VF=9.6V(TYP.) IF=100mA 15-chip White LED
8. Unspecified tolerance: $\pm 0.30mm$
9. LUMINANCE: $160 cd/m^2$ (Typ.)

CUSTOMER'S APPROVAL

SAZENTO

Mod.Name SUY070014-102060

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	TFT



SCALE SHEET

NTS 1/1