


CUSTOMER

CUSTOMER'S CODE

RoHS

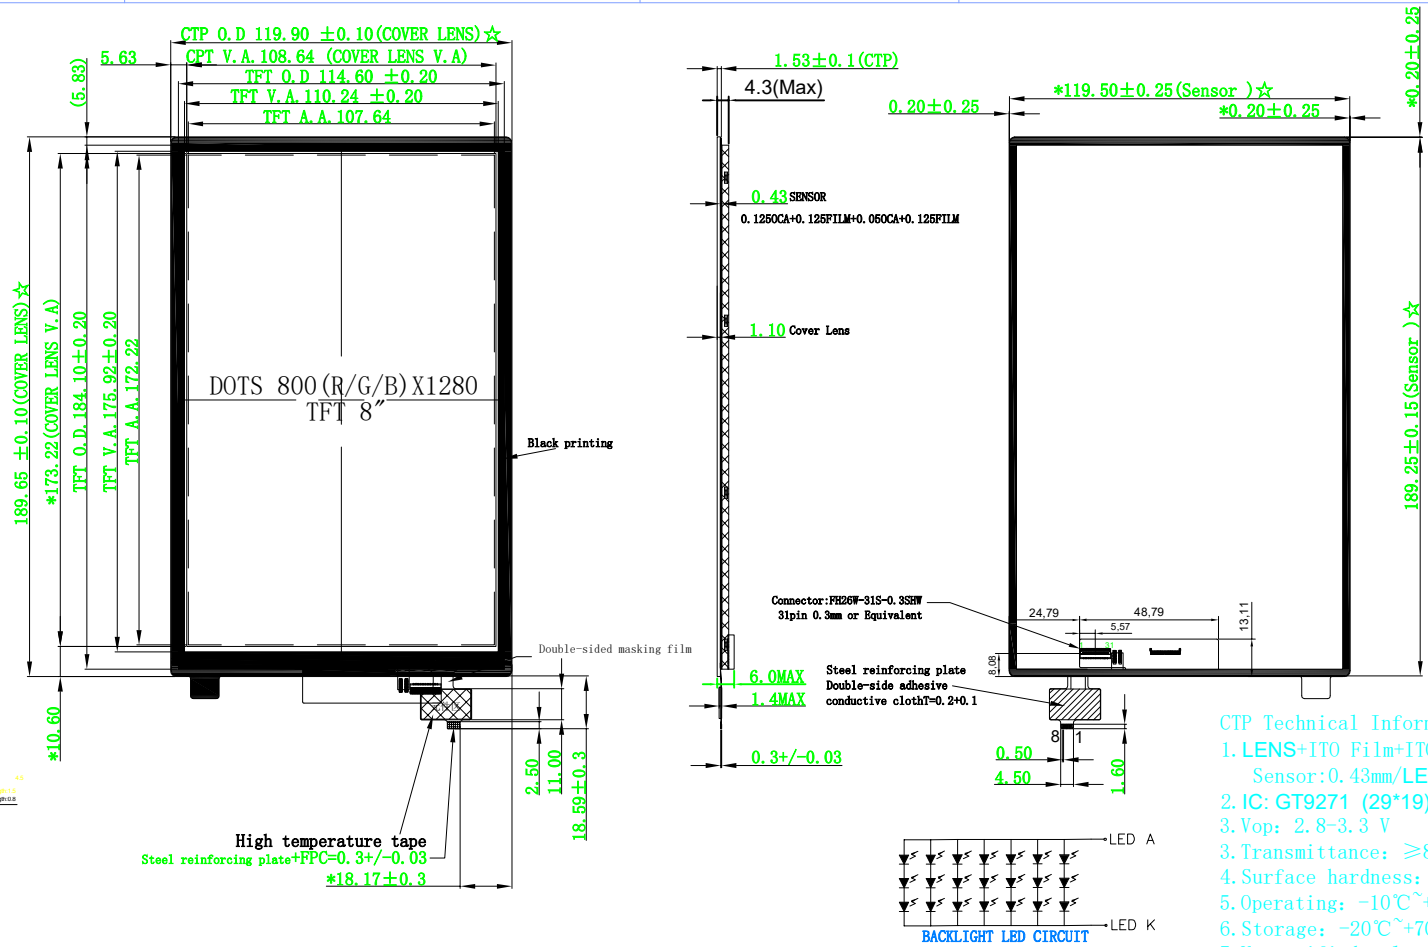

PIN NO.	DEFINE
1	LED+
2	LED+
3	LED+
4	GND
5	LED-
6	LED-
7	LED-
8	LED-
9	GND
10	GND
11	RXIN2+
12	RXIN2-
13	GND
14	RXIN1+
15	RXIN1-
16	GND
17	RXCLKIN+
18	RXCLKIN-
19	GND
20	RXIN0+
21	RXIN0-
22	GND
23	RXIN3+
24	RXIN3-
25	GND
26	TE
27	RESET
28	ID
29	VDDL
30	VDDP
31	VDDP

- CTP Technical Information:
1. LENS+ITO Film+ITO FILM+FPC(Pitch 0.5mm)  
Sensor:0.43mm/LENS:1.1mm Plating:AF
  2. IC: GT9271 (29\*19)
  3. Vop: 2.8-3.3 V
  3. Transmittance: ≥83%
  4. Surface hardness: 6H
  5. Operating: -10°C~+60°C, ≤90%RH
  6. Storage: -20°C~+70°C, ≤90%RH
  7. Unspecified tolerance: ±0.2mm

Specification	
1. Display mode:	a-Si TFT / Normally White /IPS / TRANSMISSIVE
2. Viewing Direction:	ALL
3. Power supply voltage:	Vdd=4.0V
4. Operating temp:	-20°C to 60°C , Storage temp: -30°C to 60°C
5. DRIVER IC.:	6. INTERFACE :MIPI Interface
7. BACKLIGHT:	VF=9.9V(TYP.) IF=140mA 21 White LED
8. Unspecified tolerance :	±0.30mm
9. Remark: RoHS	10. LUMINANCE: 200 cd/m <sup>2</sup>

CUSTOMER'S APPROVAL

SAZENTO					
Mod.Name		SUY080001-080128		SCALE	SHEET
				NTS	1/1
UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.