

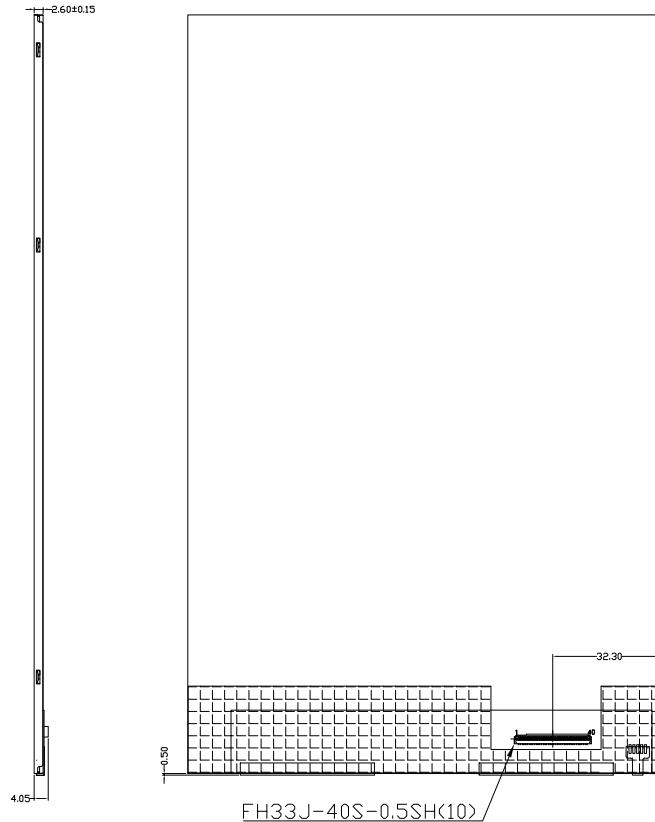


CUSTOMER

CUSTOMER'S CODE

RoHS

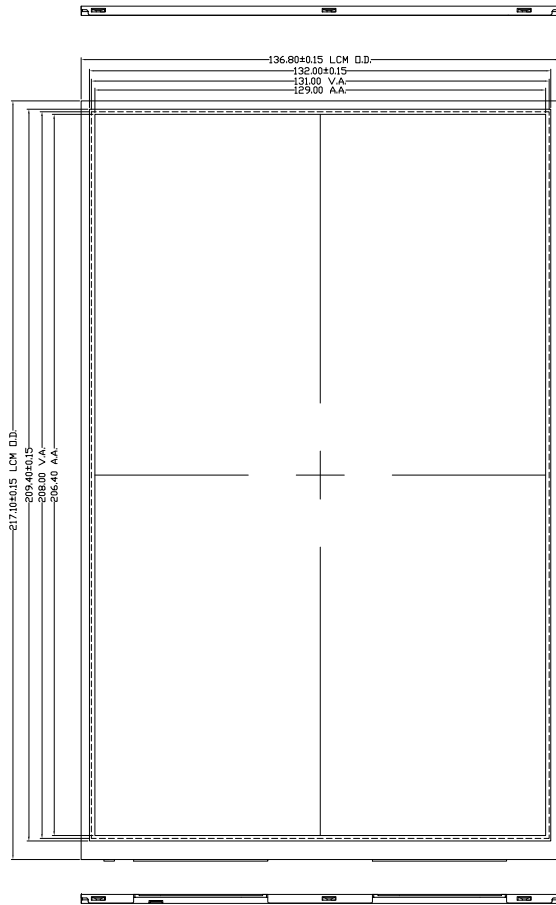


Pin Assignment		
No.	Symbol	I/O
1	VDD	P
2	VDD	P
3	VDD	P
4	NC	-
5	GND	P
6	GND	P
7	MIPI_D3-	I
8	MIPI_D3+	I
9	GND	P
10	MIPI_D2-	I
11	MIPI_D2+	I
12	GND	P
13	MIPI_CLK-	I
14	MIPI_CLK+	I
15	GND	P
16	MIPI_D1-	I
17	MIPI_D1+	I
18	GND	P
19	MIPI_D0-	I/O
20	MIPI_D0+	I/O
21	GND	P
22	CABC_EN0	I
23	CABC_EN1	I
24	LED_PWM	O
25	NC	-
26	LED+	P
27	LED+	P
28	LED1-	P
29	LED2-	P
30	LED3-	P
31	LED4-	P
32	TP_I2C_SDA	P
33	TP_I2C_SCL	I
34	TP_GND	P
35	TP_GND	P
36	TP_VDDIO	P
37	TP_INT	I
38	TP_AVDD	P
39	TP_RESET	P
40	TP_GND	P

Specification

- 1.Display mode: 9.6" IPS TFT LCD, Transmissive
- 2.Viewing Direction: All O'clock
- 3.Back-Light: WHITE LED*28 , Vf=23.1V , If=80mA
- 4.Operating temp: -10°C to 60°C , Storage temp: -20°C to 70°C
- 5.IC NO. : NT51017BH 6.LCM Luminance :Typ.240 cd/m²
- 6.Unspecified tolerance : ±0.20mm
- 7.Remark: RoHS LCD NO.:

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY096001-080128

SCALE SHEET

NTS 1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.