
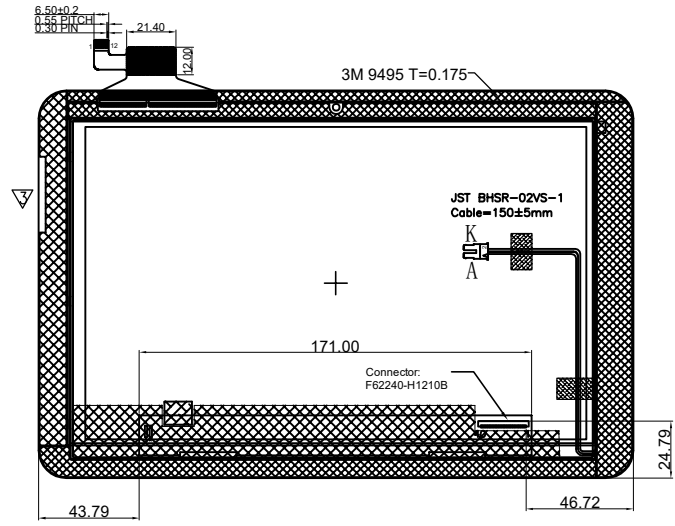
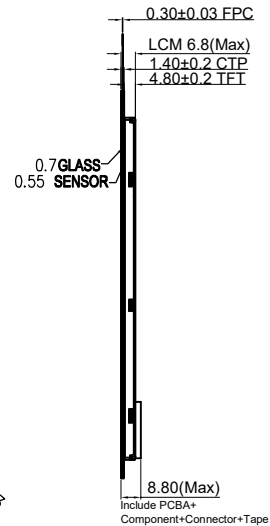


CUSTOMER

CUSTOMER'S CODE

RoHS

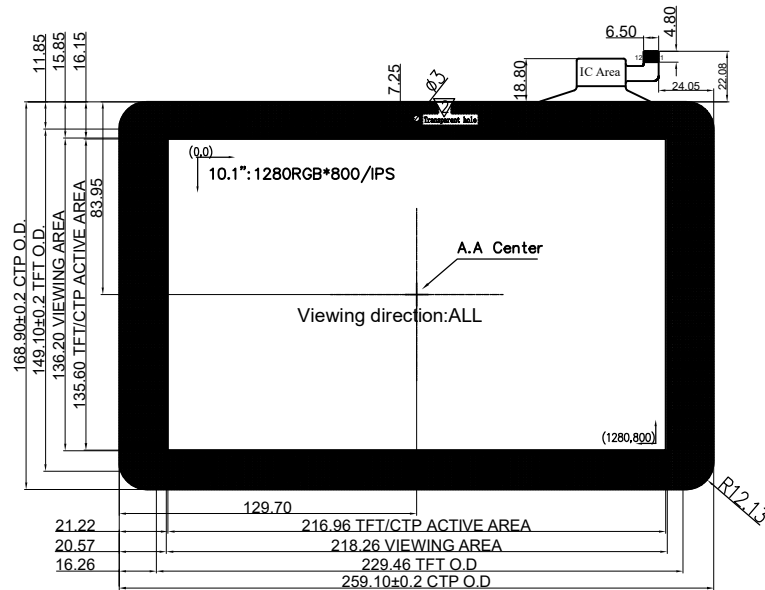

TFT PIN ASSIGNMENT


1.	VCOM
2.	VDD
3.	VDD
4.	NC
5.	NC
6.	NC
7.	GND
8.	Rxin0-
9.	Rxin0+
10.	GND
11.	Rxin1-
12.	Rxin1+
13.	GND
14.	Rxin2-
15.	Rxin2+
16.	GND
17.	RxCLK-
18.	RxCLK+
19.	GND
20.	Rxin3-
21.	Rxin3+
22.	GND
23.	NC
24.	NC
25.	GND
26.	NC
27.	LED_PWM
28.	NC
29.	AVDD
30.	GND
31.	LED-
32.	LED-
33.	NC
34.	NC
35.	VGL
36.	NC
37.	CABC_EN
38.	VGH
39.	LED+
40.	LED+

CTP PIN ASSIGNMENT

1.	GND
2.	VCC
3.	INT
4.	SCL
5.	SDA
6.	RESET
7.	GND
8-11.	NC
12.	GND

CTP Specification:

- Structure: Lens+Sensor Glass+FPC
Sensor Glass: 0.55mm
Lens : 0.7mm
Driver IC: FT 5506
- Operating Voltage : 2.8V-3.3 V
- Transmittance: ≥85%
- Surface hardness: 6H
- Operating Environment: -20°C~+70°C, ≤90%RH
- Storage Environment: -30°C~+80°C, ≤90%RH
- Unspecified tolerance: ±0.2mm

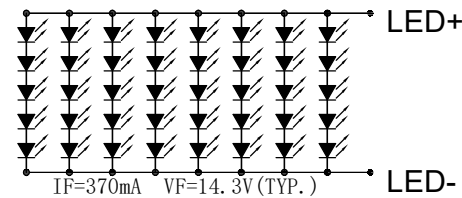


LED CIRCUIT DIAGRAM

TFT Specification

- Display mode: a-Si TFT / Normally White / IPS / TRANSMISSIVE
- Viewing Direction: All O'clock 3. Power supply voltage: VDD=3.3V
- Operating temp: -20°C to 70°C, Storage temp: -30°C to 80°C
- DRIVER IC.: ***
- INTERFACE : LVDS Interface
- BACKLIGHT: VF=14.3(TYP.) IF=370mA 40-chip White LED
- Unspecified tolerance : ±0.20mm 9. LUMINANCE: 1000 cd/m² (Typ.)

CUSTOMER'S APPROVAL

SAZENTO



Mod.Name SUY101008-128080CTP

SCALE	SHEET
NTS	1/1

UNIT	SIZE	DESIGNER	CHECK	APPROVER	FILE NAME
mm	A4	Ken Lin	jack hu	Jason Lu	Count Dwg.